



## Free Standing Cooker

HKT8032



### FEATURES

- Damprens
- Keramisk kokeplate
- Antal funktioner: 8
- Kapacitet ovnrum: 72 L
- Energiklasse: A

### Grill

Det perfekte valg til en hurtig grillning. Grill dit favoritmåltid eller færdiggør maden med en sprød skorpe.



### Easy clean dør

Medmindre rengøring af ovne er din hobby, vil du elske at høre, at vores Easy clean ovndøre kan skilles ad i et enkelt greb. Alle glaslagene kan adskilles uden brug af værktøj, du skal blot trække op i top beslaget, så er glassene lige til at tage ud og rengøre.

### Varmluft

Ægte varmluft er det perfekte program til at lave den store steg eller til bagning. Varmelegemet, der er placeret omkring blæseren, giver en jævn varmfordeling, der sikrer et ensartet resultat i hele ovnrummet. Øget varmluft giver samtidig mulighed for at tilberede 3 forskellige retter samtidig, uden at smag og aromaer blandes.

GENERAL	
Type	Free-Standing
Capacity Oven	72 L
Color	White
Oven Type	Multifunctional Cooking
Hob Type	Electric (Vitroceramic)
BURNERPLATE	
Rear Left	Ø160 mm - 1500W (H)
Front Left	Ø210/120 mm - 750/2200 W (Duo)
Rear Right	Ø180 mm - 1800W (H)
Front Right	Ø140 mm - 1200 W (H)
Burner Plate Surface	Glass
OVEN FUNCTIONS	
Number of Cooking Functions	8 functions
Metal Handle	White
Soft Open / Soft Close Door	No
Meat Probe	No
Number of glasses in door	3
Light in Oven Cavity	1 x Round light (Rear)
Doorlock	Mechanical Lock
Display	No display
Display Brightness Adjustment	NA
Pop-In Pop-Out Knobs (PIPO)	No
Knob Color	White
Display Lock	NA
Steam Cleaning	Simple steam cleaning
Pyrolytic Cleaning	No
Cooling Fan	Yes
Booster	No
OVEN CAVITY AND ACCESSORIES	
Catalytic Back Wall	No
Removable Sideracks	5 levels
Telescopic Rails	NA
Deep Tray	1
Standard Tray	2
Wireshef	1
TECHNICAL INFORMATION	
Energy Efficiency Class	A
Dimensions (WxDxH)	60 x 60 x 90 cm
Niche Dimensions Cabinet (WxDxH)	NA
Niche Dimensions Undercounter (WxDxH)	NA
Cabel	Standard
Cabel lenght	1,2 m
Cabel placement	Rear
Plug type	N/A
Voltage/Frequency Oven	220-240 1N~/ 380-415 3N~

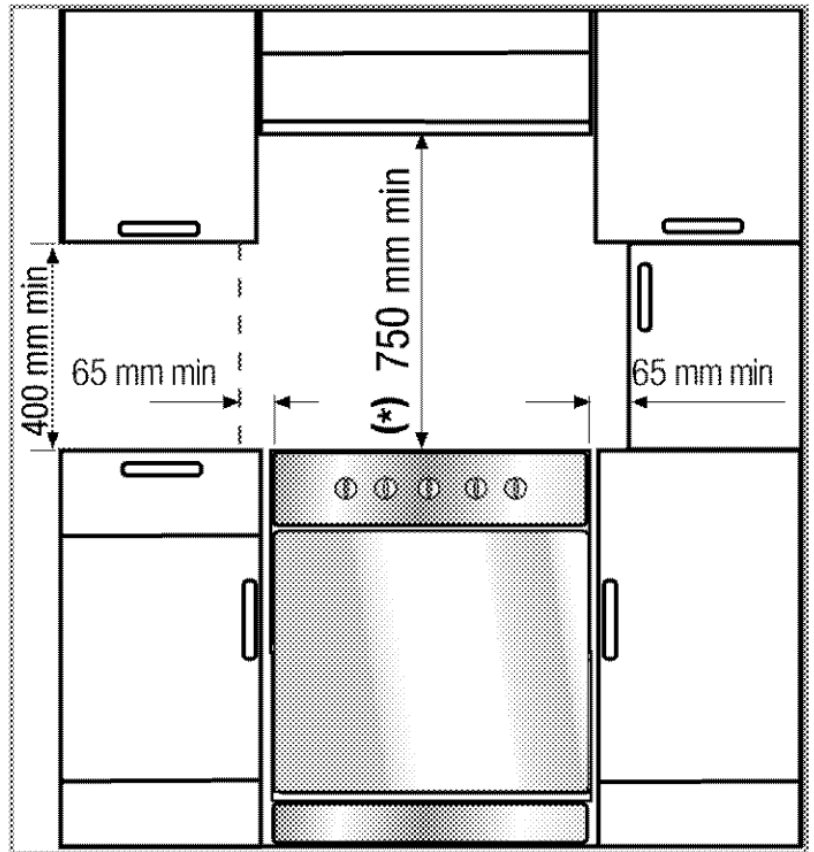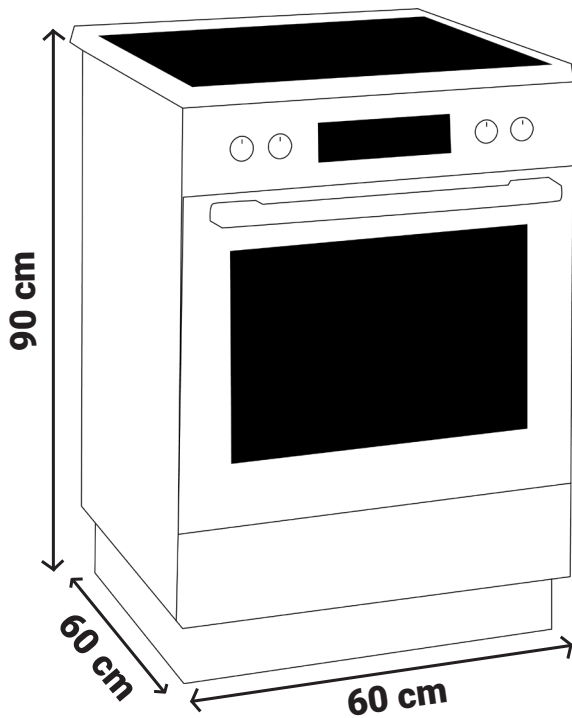

- To ensure that critical air openings are maintained under the product, we recommend that this product is mounted on a solid base and that the feet do not sink into a carpet or soft floor covering. The kitchen floor must be able to support the weight of the unit plus the additional weight of pots, pans, and the food being cooked.
- This product is a Class 2 appliance, i.e. it can be placed with its back end and one side to the kitchen walls, kitchen fixtures or equipment of any size. Kitchen furniture or equipment on the other side can only be the same size or smaller.
- The product can be placed with cabinets on both sides, but there must be a minimum distance of 400 mm above the stove and a side clearance of 65 mm between the appliance and all walls, parts or tall cabinets.
- The appliance can also be freestanding. In this case, leave a minimum distance of 750 mm above the surface of the stove. If a kitchen fan is to be installed above the appliance, the height of the hood should be at least 650 mm, unless otherwise stated.