



Free-Standing Single Door - No Freezer

SSM4560XN



FEATURES

- Metal håndtag
- 35 dBA
- 198 liter
- Vin/flaske holder

Vin/flaske holder

Opbevaring af flasker til køling kan være pladskrævende og medføre risiko for, at flaskerne ikke ligger stabilt. En vinhylde er tilpasset flaskens form, så den holder sig stabil og med nem adgang. Hylden fungerer også godt til sodavandsflasker eller andre flasker.

Metal håndtag

Blombergs køleprodukter er udstyret med brugervenlige og robuste metalhåndtag, der ikke kun gør det let at åbne døren, men også giver skabet et elegant udseende.

LED lys


Belysning med hvidt LED-lys, giver bedre oversigt i skabet, et mere æstetisk udseende og et mindre energiforbrug.

GENERAL

Type	Free-Standing
Capacity	198 liters
Color	Inox
Freezer Position	No Freezer
Cooling System Type	Static
Control	Rotational Controller on Ceiling
Control System	Mechanic
Display	No
Display Type	No Display
Light	LED
Door Opening Direction	Right
Reversible Door	Yes
Open Door Alarm	No
Quick Cool	No
Eco Mode	No
Holiday Mode	No
VitaminZone	No
Dairy Compartment	No
Glas Shelves	Glass-All standard
Wine Rack Type	54 cm wine rack

PERFORMANCE AND TECHNICAL INFORMATION

Energy Efficiency Class	E
Noiselevel	35 dBA
Noiselevel Class	B
Climat Class	SN-ST
Dimensions (HxWxD)	123.3 x 54.0 x 57.4 cm
Plug Type	European
Cable Lenght	2.20 m
Energy Consumption (kWh/annum)	98 kWh/annum
Refrigerant	R600a
Refrigerant Charge (kg)	0.024

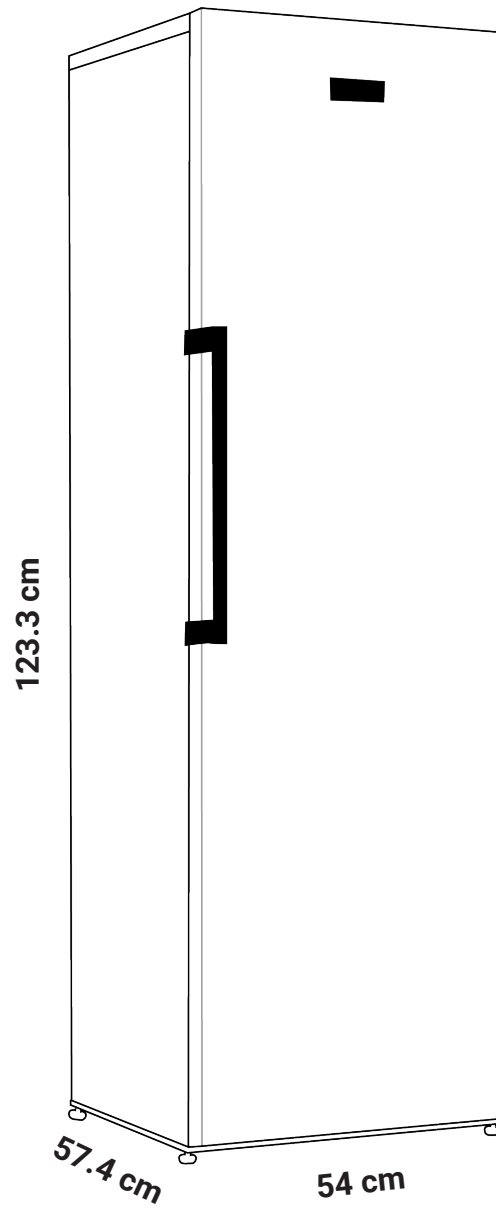

- The fridge should be installed at least 30 cm away from heat sources such as hobs, ovens, radiators and stoves, at least 5 cm away from electric ovens and should not be placed in direct sunlight.
- The ambient room temperature should be at least 10°C. Operating the refrigerator in cooler conditions than this is not recommended for the performance of the appliance.
- If two refrigerators are to be installed next to each other, the distance between them should be at least 2 cm.
- There must be sufficient ventilation around the refrigerator for efficient operation. If the refrigerator is to be placed in a recess in the wall wall, there must be at least 5 cm distance from the ceiling and wall. If the floor is carpeted, the product must be raised 2.5 cm from the floor.
- Place the refrigerator on an even floor surface to avoid shaking movements.
- Do not place the fridge where ambient temperatures are below 10°C.